

■ Applications


- Uninterruptible Power Supply
- Power Factor Correction
- Welding Converters
- Inverter
- Converter with high switching frequency


■ Features

- Low switching power loss
- High speed switching
- High ruggedness, temperature stable
- Low $V_{CE(sat)}$
- Maximum junction temperature 175°C
- Short circuit withstand time – 3uS
- RoHS and Halogen-Free Compliant

■ Product Summary

V_{CES}	650	V
I_C	50	A
$V_{CE(sat), Typ@15V}$	1.8	V





TO-247L

Gate: 1
Collector: 2
Emitter: 3

Marking	Package	Packaging	Min. package quantity
MSLB50N065J2H	TO-247L	Tube	450



■ Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Collector-emitter Voltage	V_{CES}	650	V
DC collector current, limited by T_{jmax} TC=25°C TC=100°C	I_C	80 50	A
Pulsed collector current, t_p limited by T_{jmax}	$I_{C\ Pulse}$	200	A
Diode forward current, limited by T_{jmax} TC=25°C TC=100°C	I_F	80 50	A
Diode Pulsed current, t_p limited by T_{jmax}	$I_{F\ Pulse}$	200	A
Continuous Gate-emitter voltage	V_{GE}	±20	V
Short Circuit Withstand Time, $V_{GE}=15V, V_{CE} \leq 400V$	T_{SC}	3	us
Power Dissipation (TC=25°C)	P_D	187	W
Junction Temperature	T_j	175	°C
Storage Temperature	T_{STG}	-55-150	°C

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

■ Thermal Characteristics

Parameter	Symbol	Max	Unit
IGBT Maximum Junction-to-Case	$R_{\theta JC}$	0.8	°C/W
Diode Maximum Junction-to-Case	$R_{\theta JC}$	0.85	°C/W
Maximum Junction-to-Ambient	$R_{\theta JA}$	40	°C/W

Note: This transistor is sensitive to electrostatic discharge and should be handled with care.



■ Electrical Characteristics (Tc=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static Characteristics						
Drain-Source Breakdown Voltage	BV_{CES}	$V_{GE}=0V, I_C=200\mu A$	650	-	-	V
Zero gate voltage collector current	I_{CES}	$V_{CE}=650V, V_{GE}=0V$	-	-	5	μA
Gate-emitter leakage current	I_{GES}	$V_{GE}=\pm 20V, V_{CE}=0V$	-	-	± 100	nA
Gate-emitter threshold voltage	$V_{GE(TH)}$	$V_{CE}=V_{GE}, I_C=250\mu A$	4	4.7	6	V
Collector-emitter saturation voltage	$V_{CE(sat)}$	$V_{GE}=15V, I_C=50A$	-	1.8	2.1	V
		$T_j=150^\circ C$	-	2.4	-	V
Diode forward voltage	V_F	$I_F=50A$	-	1.45	1.8	V
		$T_j=150^\circ C$	-	1.2	-	V
Dynamic Characteristics						
Input Capacitance	C_{ies}	$V_{CE}=25V, V_{GE}=0V,$ $f=1.0MHz$	-	2750	-	pF
Output Capacitance	C_{oes}		-	180	-	pF
Reverse Transfer Capacitance	C_{res}		-	63	-	pF
Integrated gate resistor	R_{Gint}		-	3.7	-	Ω
Total Gate Charge	Q_g	$V_{CC}=400V, I_C=50A,$ $V_{GE}=15V$	-	105	-	nC
Gate-to-emitter charge	Q_{ge}		-	15	-	nC
Gate-to-collector charge	Q_{gc}		-	45	-	nC
Internal emitter inductance measured 5mm (0.197 in.) from case	L_E		-	13	-	nH









■ Switching Characteristic, Inductive Load, at $T_j=25^\circ\text{C}$


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
IGBT Switching Characteristics						
Turn-On Delay Time	$t_{d(on)}$	$V_{CC}= 400\text{V}$ $I_C= 50\text{A}$ $V_{GE}= 15\text{V}$ $R_G= 10\Omega$ Inductive load	-	40	-	ns
Turn-On Rise Time	t_r		-	42	-	ns
Turn-Off Delay Time	$t_{d(off)}$		-	130	-	ns
Turn-Off Fall Time	t_f		-	40	-	ns
Turn-on energy	E_{on}		-	1.05	-	mJ
Turn-off energy	E_{off}		-	0.32	-	mJ
Diode Characteristics						
Reverse Recovery Time	t_{rr}	$V_R=400\text{V}, I_F=20\text{A},$ $di/dt=200\text{A/us}$	-	75	-	ns
Reverse Recovery Charge	Q_{rr}		-	0.23	-	μC
Peak Reverse Recovery Current	I_{rrm}		-	6	-	A

■ Switching Characteristic, Inductive Load, at $T_j=150^\circ\text{C}$


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
IGBT Switching Characteristics						
Turn-On Delay Time	$t_{d(on)}$	$V_{CC}= 400\text{V}$ $I_C= 50\text{A}$ $V_{GE}= 15\text{V}$ $R_G= 10\Omega$ Inductive load	-	42	-	ns
Turn-On Rise Time	t_r		-	45	-	ns
Turn-Off Delay Time	$t_{d(off)}$		-	135	-	ns
Turn-Off Rise Time	t_f		-	70	-	ns
Turn-on energy	E_{on}		-	1.35	-	mJ
Turn-off energy	E_{off}		-	0.44	-	mJ
Diode Characteristics						
Reverse Recovery Time	t_{rr}	$V_R=400\text{V}, I_F=20\text{A},$ $di/dt=200\text{A/us}$	-	100	-	ns
Reverse Recovery Charge	Q_{rr}		-	0.6	-	μC
Peak Reverse Recovery Current	I_{rrm}		-	12	-	A

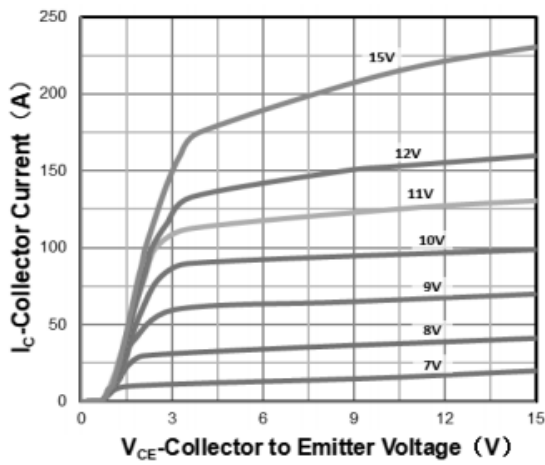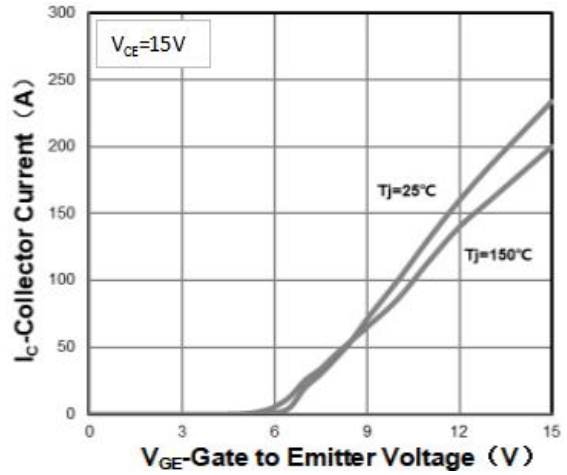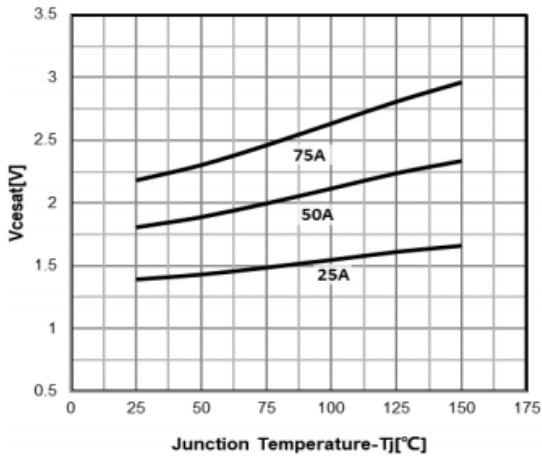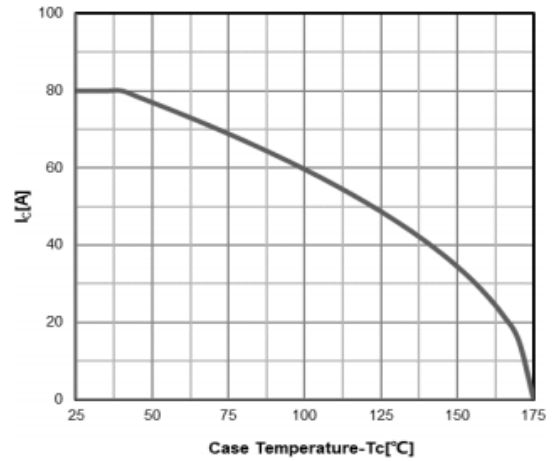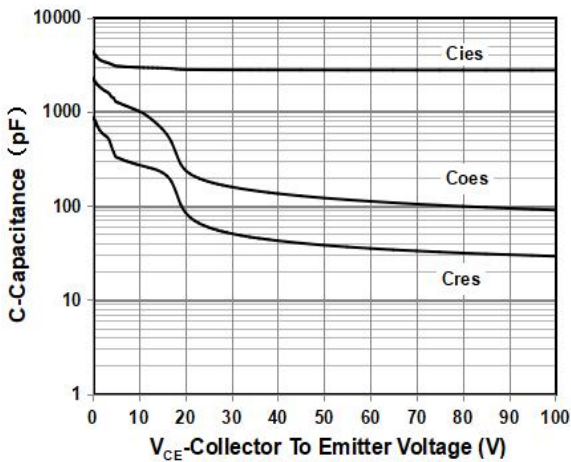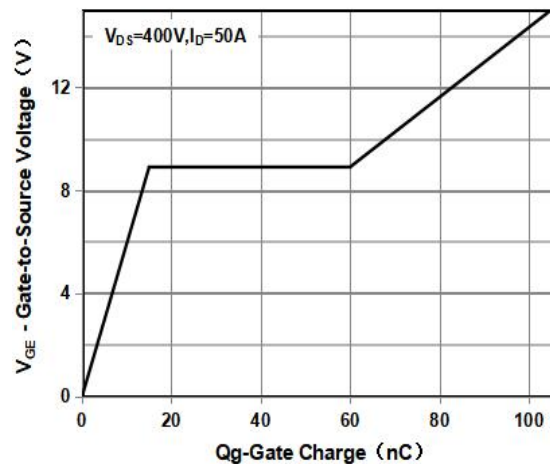

■ Characteristics Curves

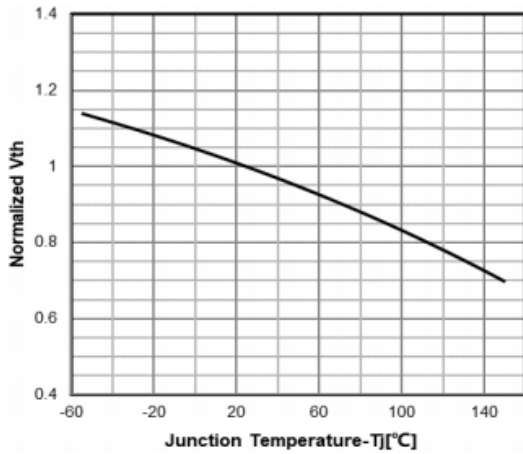Output Characteristics

Transfer Characteristics

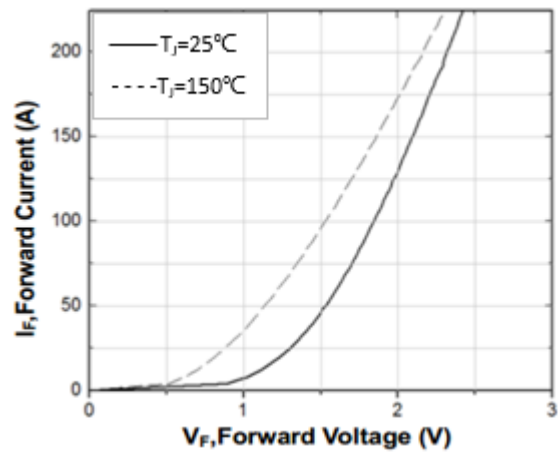Typical collector-emitter saturation voltage as a function of junction temperature

Collector current as a function of case temperature ($V_{GE} \geq 15V, T_{vj} \leq 175^\circ C$)

Capacitance

Typical gate charge

Gate-emitter threshold voltage as a function of junction temperature



Typ. diode forward current as a function of forward voltage

Note : The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.



TO-247L Package Dimensions

Unit: mm

Symbol	Min	Nom	Max	Symbol	Min	Nom	Max
A	4.80		5.20	E1	13.00		13.60
A1	2.20	2.40	2.60	E2	5.00		5.50
A2	1.85		2.15	E3	1.90		2.60
b	1.07		1.33	e		5.44	
b2	1.90		2.16	L	19.30		19.90
b4	2.90		3.20	L1	3.75	3.95	4.15
c	0.52		0.68	ΦP	3.40		3.80
D	20.70		21.30	ΦP1	7.00		7.40
D1	16.15		16.95	S	6.04	6.15	6.30
E	15.50		16.10				

