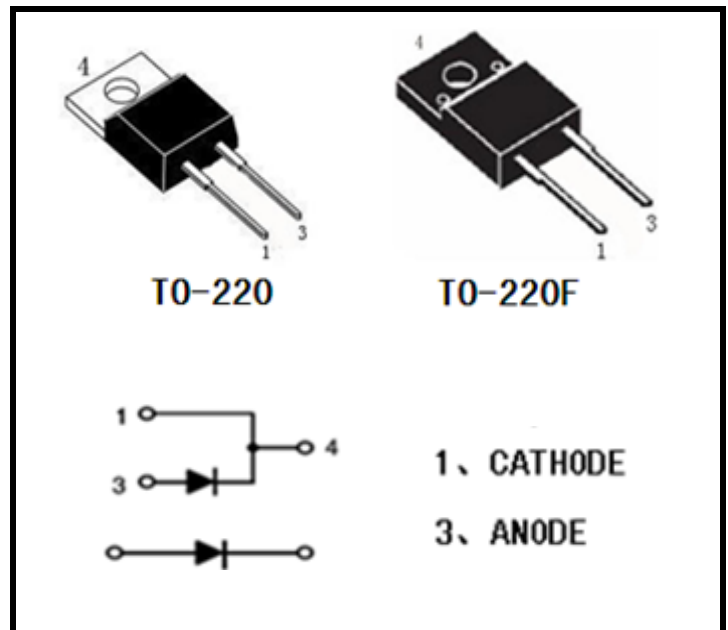


**PRODUCT FEATURES**

- Ultrafast Recovery Time
- Soft Recovery Characteristics
- Low Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current

APPLICATIONS

- Freewheeling, Snubber, Clamp
- Inversion Welder
- PFC
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Converter & Chopper
- UPS

**ABSOLUTE MAXIMUM RATINGS**

TC=25° C unless otherwise specified

Symbol	Parameter	Test Conditions	Value	Unit
V_R	D.C. Reverse Voltage		400	V
V_{RRM}	Repetitive Reverse Voltage		400	V
$I_{F(AV)}$ (per leg)	Average Forward Current	$T_C=110^{\circ}\text{C}$, Duty=0.5	8	A
I_{FM}	Peak Repetitive Forward Current	$T_C=110^{\circ}\text{C}$, Duty=0.5	8	A
I_{FSM}	Non-Repetitive Surge Forward Current	$T=45^{\circ}\text{C}$, 8.3ms,	120	A
T_J	Junction Temperature		-55 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range		-55 to +150	$^{\circ}\text{C}$

ELECTRICAL AND THERMAL CHARACTERISTICS

TC=25° C unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit	
I _{RM}	Reverse Leakage Current	V _R =600V, T _J =25°C	--	--	5	μA	
		V _R =600V, T _J =125°C	--	--	100	μA	
V _F	Forward Voltage	I _F =8A, T _J =25°C	--	1.3	1.5	V	
		I _F =8A, T _J =125°C	--	1.1	--	V	
t _{rr}	Reverse Recovery Time (I _F =1A, V _R =30V, di _F /dt=-200A/μs)		--	35	--	ns	
t _{rr}	Reverse Recovery Time	I _F =8A VR=400V diF/dt=-200A/μs	T _J =25°C	--	55	--	ns
t _{rr}	Reverse Recovery Time		T _J =125°C	--	75	--	ns
Q _{rr}	Reverse Recovery Charge		T _J =125°C	--	210	--	nC
I _{RRM}	Max. Reverse Recovery Current		T _J =125°C	--	5	--	A

THERMAL CHARACTERISTICS


Rating	Symbol	Value		Unit
Maximum Thermal Resistance	θ_{JC}	T0-220	2.5	$^{\circ}\text{C}/\text{W}$
		T0-220F	4	



TO-220 MECHANICAL DATA

UNIT: mm

SYMBOL	MIN	NOM	MAX	SYMBOL	MIN	NOM	MAX
A	4		4.8	e		2.54	
B	1.2		1.4	e1	1		1.5
B1	1		1.4	F	1.1		1.4
b1	0.65		1	L	12.5		14.5
c	0.4		0.55	L1	3	3.5	4
D	15		16.5	ΦP		3.8	
D1	5.9		6.9	Q	2.5		3
E	9.9		10.7	Q1	2		2.9

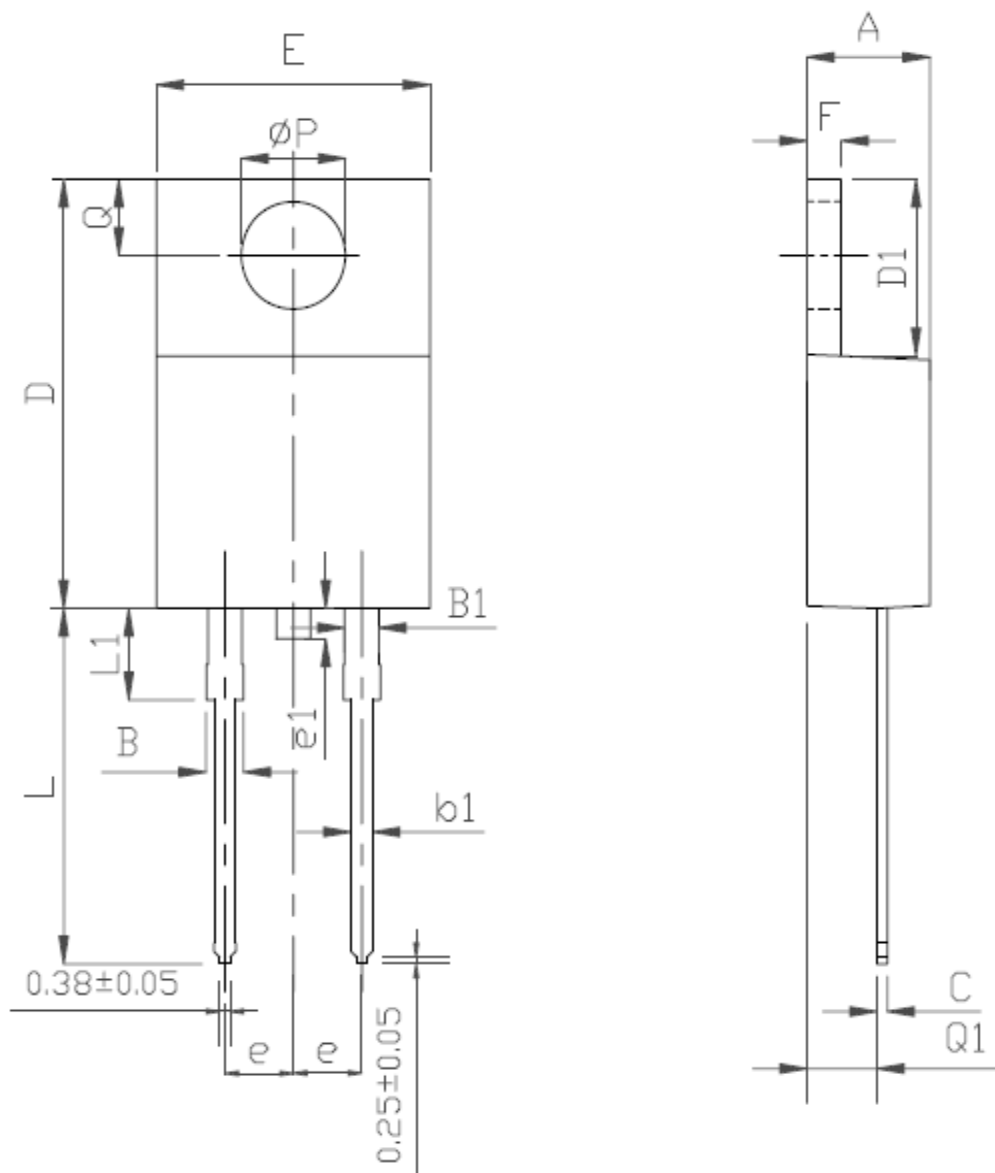



TO-220F MECHANICAL DATA

UNIT: mm

SYMBOL	MIN	NOM	MAX	SYMBOL	MIN	NOM	MAX
A	4.5		4.9	E1	6.5	7	7.5
A1	2.3		2.9	e	2.44	2.54	2.64
b	0.45		0.9	e1	1		1.5
b1	1.1		1.7	L	12.5		14.3
b2	1.2		1.4	L1	9.45		10.05
c	0.35		0.65	L2	15		16
D	14.5		17	L3	3.2		4.4
D1	6.1		6.9	ΦP	3		3.3
E	9.6		10.3	Q	2.5		2.9

