

» Applications

- Synchronus Rectification
- Industrial and Motor Drive
- DC/DC and AC/DC Converters
- Power Tools

» Product Summary



V_{DS}	30	V
I_D	75	A
$R_{DS(ON), Typ@10V}$	4.0	m Ω
$R_{DS(ON), Typ@4.5V}$	6.5	m Ω
Q_g	25	nC

» Features

- High-Speed Switching
- Low $R_{DS(ON)}$
- Enhanced Body diode dv/dt capability
- Enhanced Avalanche Ruggedness
- 100% UIS and RG Tested



TO-252

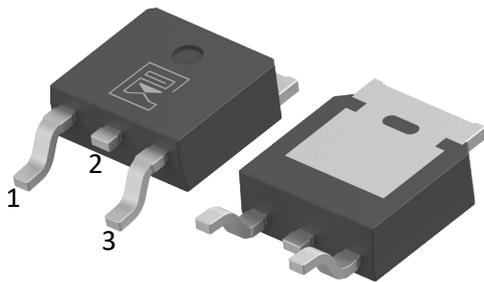

Gate: 1
Drain: 2
Source: 3

» Package Marking and Ordering Information

Ordering code	Marking	Package	Packaging	Min. package quantity
MK4D5R030TL	MK4D5R030TL	TO-252	Tape & Reel	3000

»» Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	±20	V
Continuous Drain Current Tc=25°C (Note 1)	I_D	75	A
Continuous Drain Current Tc=100°C (Note 1)		50	A
Drain Current-Pulsed (Note 1)	I_{DM}	240	A
Total Dissipation	P_D	66	W
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	-55-150	°C
Single Pulse Avalanche Energy (Note 2)	E_{AS}	250	mJ

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

»» Thermal Characteristics

Parameter	Symbol	Max	Unit
Maximum Junction-to-Case	$R_{\theta JC}$	1.9	°C/W
Maximum Junction-to-Ambient	$R_{\theta JA}$	60	°C/W

Note 1: Ensure that the channel temperature does not exceed 150°C.

Note 2: $V_{DD}=30V$, $T_{ch}= 25^{\circ}C$ (initial), $L=0.5mH$, $R_g=25\Omega$.

Note: This transistor is sensitive to electrostatic discharge and should be handled with care.




Electrical Characteristics (Tc=25°C unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static Parameters						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	30	-	-	V
Drain-Source Leakage Current	I_{DSS}	$V_{DS}=30V, V_{GS}=0V$	-	-	1	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V$	-	-	± 100	nA
Gate Threshold Voltage	$V_{GS(TH)}$	$V_{GS}=V_{DS}, I_D=250\mu A$	1.2	1.6	2.2	V
Drain-Source On Resistance	$R_{DS(ON)}$	$V_{GS}=4.5V, I_D=15A$	-	6.5	7.5	m Ω
		$T_j=125^\circ C$	-	9.8	-	
		$V_{GS}=10V, I_D=20A$	-	4.0	4.5	
		$T_j=125^\circ C$	-	6.0	-	
Dynamic Characteristics						
Input Capacitance	C_{iss}	$V_{DS}=20V, V_{GS}=0V,$ $f=1.0MHz$	-	2000	-	pF
Output Capacitance	C_{oss}		-	210	-	pF
Reverse Transfer Capacitance	C_{rss}		-	185	-	pF
Gate Resistance	R_g	$V_{DS}=0V, V_{GS}=0V,$ $f=1.0MHz$	-	4	-	Ω
Switching Paramters						
Turn-On Delay Time	$t_{d(on)}$	$V_{DS}=15V, I_D=20A,$ $V_{GS}=10V, R_G=3\Omega$	-	7	-	ns
Turn-On Rise Time	t_r		-	8	-	ns
Turn-Off Delay Time	$t_{d(off)}$		-	20	-	ns
Turn-Off Rise Time	t_f		-	5	-	ns
Total Gate Charge	Q_g	$V_{DS}=15V, I_D=20A,$ $V_{GS}=10V$	-	25	-	nC
Gate-Source Charge	Q_{gs}		-	5	-	nC
Gate-Drain Charge	Q_{gd}		-	5	-	nC
Source-Drain Characteristics						
Diode Forward Voltage	V_{sd}	$V_{GS}=0V, I_S=10A$	-	0.8	1.2	V
Reverse Recovery Time	t_{rr}	$V_R=15V, I_F=20A,$ $di/dt=200A/\mu s$	-	19	-	ns
Reverse Recovery Charge	Q_{rr}		-	42	-	nC




Characteristics Curves

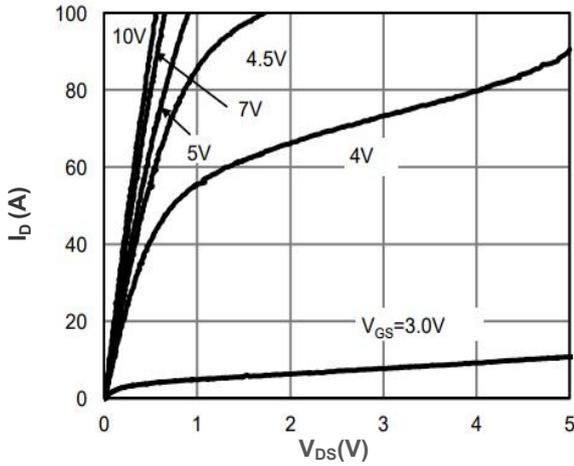


Output Characteristics

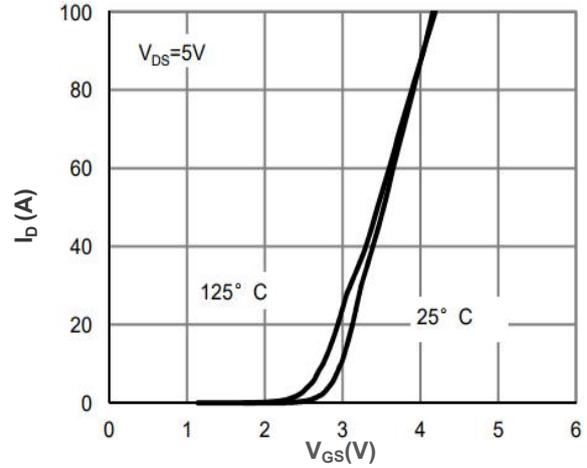


Transfer Characteristics

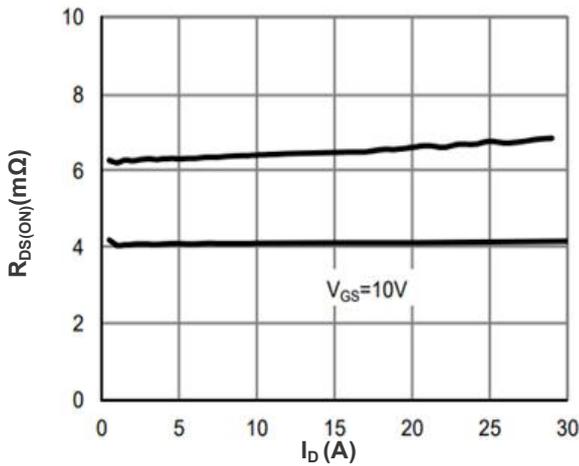


On Resistance Vs Drain Current

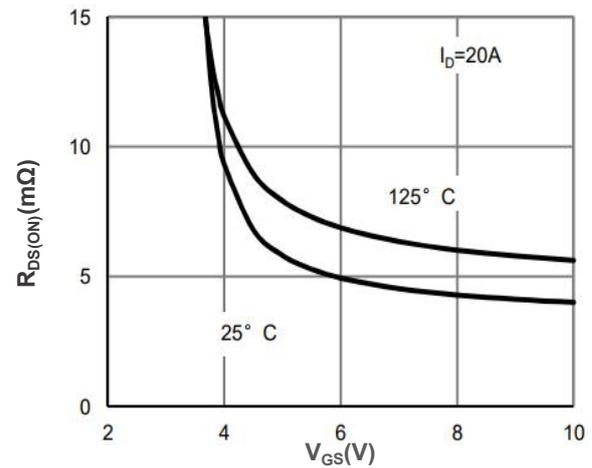


On Resistance Vs Gate Source Voltage

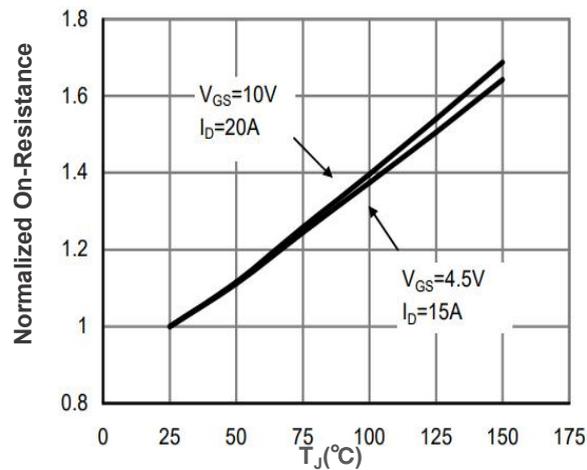


Rdson-JunctionTemperature

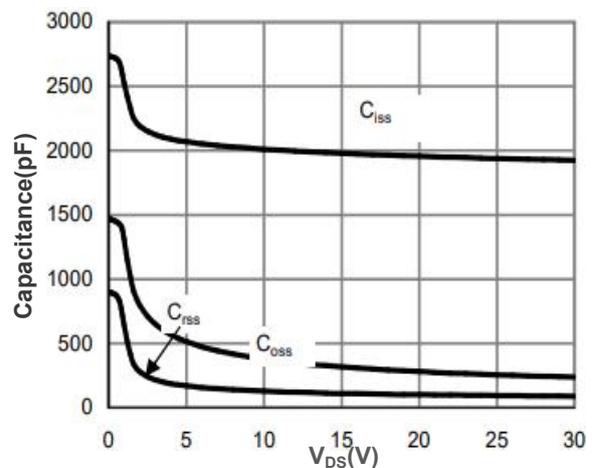


Capacitance

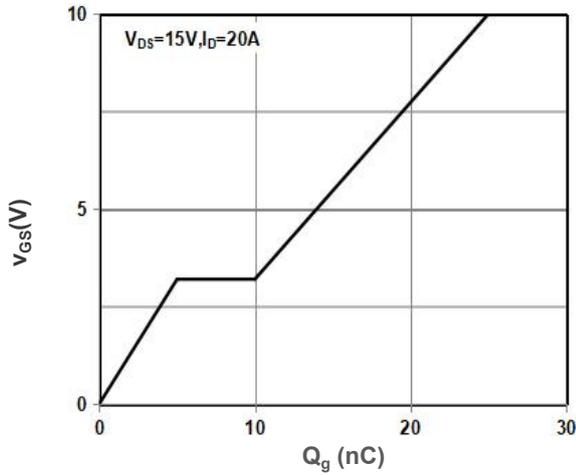

Gate Charge Waveform

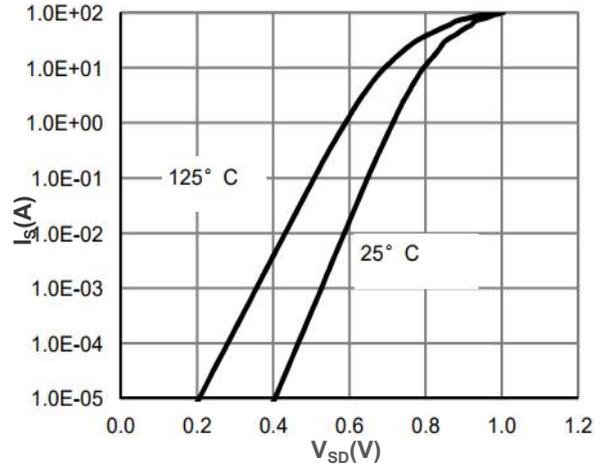

Source-Drain Diode Forward Voltage

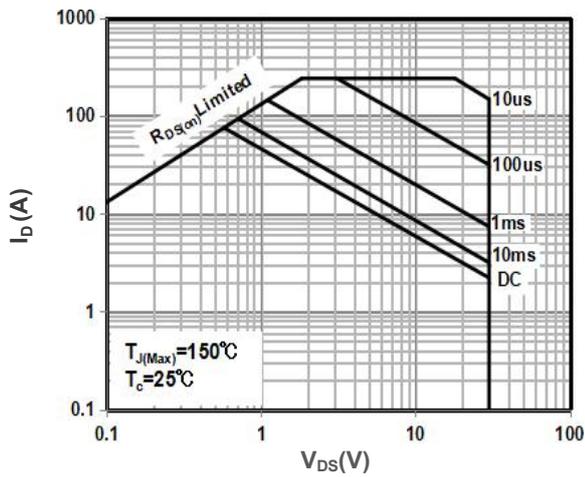


Maximum Safe Operating Area

Note : The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.




Test Circuit & Waveform


Gate Charge Test Circuit & Waveform

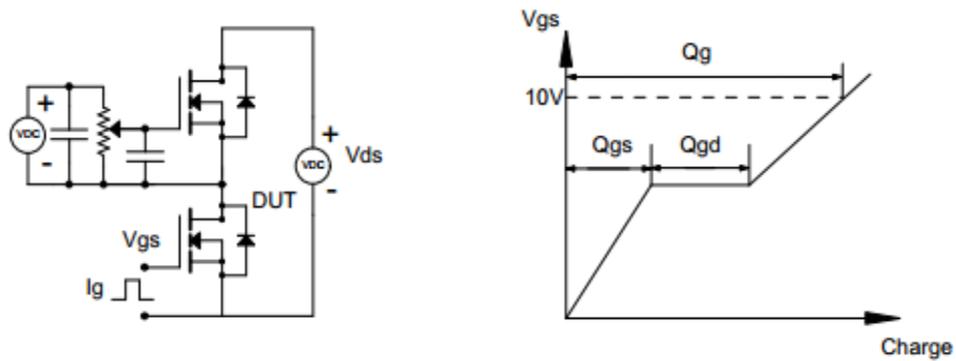

Resistive Switching Test Circuit & Waveform

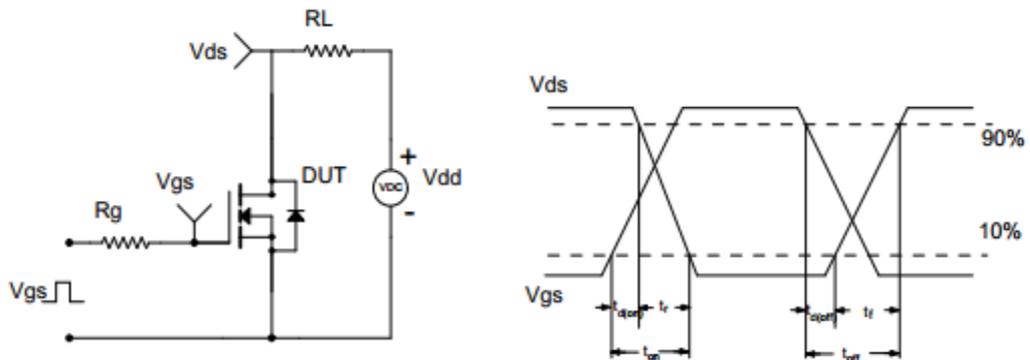

Unclamped Inductive Switching (UIS) Test Circuit & Waveform

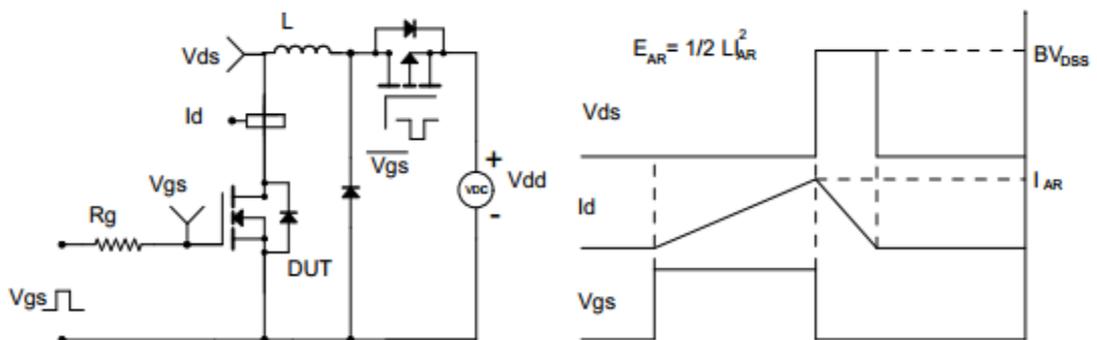



TO-252 Package Dimensions

Unit: mm

Symbol	Min	Nom	Max	Symbol	Min	Nom	Max
A	2.20		2.40	L	9.80		10.40
A1	0.00		0.13	L1		2.90	
b	0.66		0.86	L2	1.40		1.60
c	0.46		0.58	L3		1.80	
D	6.50		6.70	L4	0.60		1.00
D1	5.10		5.46	L5	0.90		1.25
D2		4.83		Φ	1.1		1.30
E	6.00		6.20	θ	0°		8°
e	2.19		2.39	V		5.35	

