

## Applications

- Industrial UPS
- Welding machine
- Solar converters
- Energy Storage
- Mid to high range switching frequency converters

## Features


- Low switching power loss
- Low switching surge and noise
- Advanced Fieldstop technology
- Qualified according to JEDEC for target applications


## Product Summary

|                        |     |   |
|------------------------|-----|---|
| $V_{CES}$              | 650 | V |
| $I_C$                  | 50  | A |
| $V_{CE(sat), Typ@15V}$ | 1.7 | V |



### TO-247L

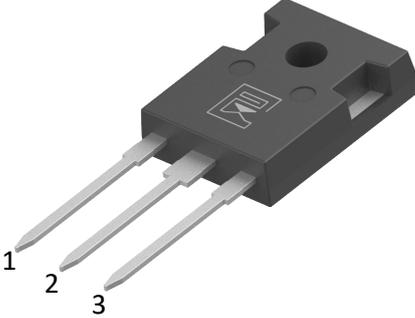

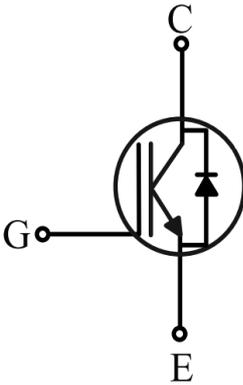

Gate: 1  
Collector: 2  
Emitter: 3

## Package Marking and Ordering Information

| Ordering code | Marking       | Package | Packaging | Min. package quantity |
|---------------|---------------|---------|-----------|-----------------------|
| MSLB50N065T5U | MSLB50N065T5U | TO-247L | Tube      | 450                   |

**»» Absolute Maximum Ratings (Tc=25°C unless otherwise noted)**

| Parameter   | Symbol         | Ratings   | Unit |
|---|----------------|-----------|------|
| Collector-emitter Voltage   | $V_{CES}$      | 650       | V    |
| DC collector current, limited by $T_{jmax}$<br>TC=25°C<br>TC=100°C  | $I_C$          | 100<br>50 | A    |
| Pulsed collector current, tp limited by $T_{jmax}$                  | $I_{C\ Pulse}$ | 150       | A    |
| Diode forward current, limited by $T_{jmax}$<br>TC=25°C<br>TC=100°C | $I_F$          | 100<br>50 | A    |
| Diode Pulsed current, tp limited by $T_{jmax}$                      | $I_{F\ Pulse}$ | 150       | A    |
| Continuous Gate-emitter voltage                                     | $V_{GE}$       | ±20       | V    |
| Power Dissipation (TC=25°C)   | $P_D$          | 273       | W    |
| Junction Temperature  | $T_J$          | 175       | °C   |
| Storage Temperature   | $T_{STG}$      | -55-175   | °C   |

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

**»» Thermal Characteristics**

| Parameter                      | Symbol          | Max  | Unit |
|--------------------------------|-----------------|------|------|
| IGBT Maximum Junction-to-Case  | $R_{\theta JC}$ | 0.55 | °C/W |
| Diode Maximum Junction-to-Case | $R_{\theta JC}$ | 1    | °C/W |
| Maximum Junction-to-Ambient    | $R_{\theta JA}$ | 40   | °C/W |

Note: This transistor is sensitive to electrostatic discharge and should be handled with care.

**»» Electrical Characteristics (Tc=25°C unless otherwise noted)**

| Parameter  | Symbol        | Test Condition                     | Min | Typ  | Max       | Unit     |
|--|---------------|------------------------------------|-----|------|-----------|----------|
| <b>Static Characteristics</b>                                  |               |                                    |     |      |           |          |
| Collector-emitter Breakdown Voltage                            | $BV_{CES}$    | $V_{GE}=0V, I_C=0.5mA$             | 650 | -    | -         | V        |
| Zero gate voltage collector current                            | $I_{CES}$     | $V_{CE}=650V, V_{GE}=0V$           | -   | -    | 1         | $\mu A$  |
| Gate-emitter leakage current                                   | $I_{GES}$     | $V_{GE}=\pm 20V, V_{CE}=0V$        | -   | -    | $\pm 500$ | nA       |
| Gate-emitter threshold voltage                                 | $V_{GE(TH)}$  | $V_{CE}=V_{GE}, I_C=250\mu A$      | 3.0 | 3.9  | 5.0       | V        |
| Collector-emitter saturation voltage                           | $V_{CE(sat)}$ | $V_{GE}=15V, I_C=50A$              | -   | 1.7  | 2.1       | V        |
|  |               | $T_j=175^\circ C$                  | -   | 2.0  | -         | V        |
| Diode forward voltage  | $V_F$         | $I_F=50A$                          | -   | 2.1  | 2.5       | V        |
|  |               | $T_j=150^\circ C$                  | -   | 1.6  | -         | V        |
| <b>Dynamic Characteristics</b>                                 |               |                                    |     |      |           |          |
| Input Capacitance  | $C_{ies}$     | $V_{CE}=25V, V_{GE}=0V, f=1.0MHz$  | -   | 3470 | -         | pF       |
| Output Capacitance   | $C_{oes}$     |                                    | -   | 130  | -         | pF       |
| Reverse Transfer Capacitance                                   | $C_{res}$     |                                    | -   | 12   | -         | pF       |
| Integrated gate resistor                                       | $R_{Gint}$    |                                    | -   | 1    | -         | $\Omega$ |
| Total Gate Charge  | $Q_g$         | $V_{CC}=480V, I_C=50A, V_{GE}=15V$ | -   | 130  | -         | nC       |
| Gate-to-emitter charge   | $Q_{ge}$      |                                    | -   | 30   | -         | nC       |
| Gate-to-collector charge                                       | $Q_{gc}$      |                                    | -   | 32   | -         | nC       |
| Internal emitter inductance measured 5mm (0.197 in.) from case | $L_E$         |                                    | -   | 13   | -         | nH       |

**Switching Characteristic, Inductive Load, at  $T_j=25^\circ\text{C}$** 


| Parameter                             | Symbol       | Test Condition   | Min | Typ  | Max | Unit          |
|---------------------------------------|--------------|--|-----|------|-----|---------------|
| <b>IGBT Switching Characteristics</b> |              |  |     |      |     |               |
| Turn-On Delay Time                    | $t_{d(on)}$  | $V_{CC}= 400V$<br>$I_C= 50A$<br>$V_{GE}= 15V$<br>$R_G= 10\Omega$<br>Inductive load | -   | 20   | -   | ns            |
| Turn-On Rise Time                     | $t_r$        |  | -   | 59   | -   | ns            |
| Turn-Off Delay Time                   | $t_{d(off)}$ |  | -   | 130  | -   | ns            |
| Turn-Off Fall Time                    | $t_f$        |  | -   | 45   | -   | ns            |
| Turn-on energy                        | $E_{on}$     |  | -   | 1.5  | -   | mJ            |
| Turn-off energy                       | $E_{off}$    |  | -   | 0.65 | -   | mJ            |
| <b>Diode Characteristics</b>          |              |  |     |      |     |               |
| Reverse Recovery Time                 | $t_{rr}$     | $V_R=400V, I_F=30A,$<br>$di/dt=200A/us$  | -   | 40   | -   | ns            |
| Reverse Recovery Charge               | $Q_{rr}$     |  | -   | 0.11 | -   | $\mu\text{C}$ |
| Peak Reverse Recovery Current         | $I_{rrm}$    |  | -   | 5.6  | -   | A             |

**Switching Characteristic, Inductive Load, at  $T_j=150^\circ\text{C}$** 


| Parameter                             | Symbol       | Test Condition   | Min | Typ  | Max | Unit          |
|---------------------------------------|--------------|--|-----|------|-----|---------------|
| <b>IGBT Switching Characteristics</b> |              |  |     |      |     |               |
| Turn-On Delay Time                    | $t_{d(on)}$  | $V_{CC}= 400V$<br>$I_C= 50A$<br>$V_{GE}= 15V$<br>$R_G= 10\Omega$<br>Inductive load | -   | 22   | -   | ns            |
| Turn-On Rise Time                     | $t_r$        |  | -   | 58   | -   | ns            |
| Turn-Off Delay Time                   | $t_{d(off)}$ |  | -   | 160  | -   | ns            |
| Turn-Off Fall Time                    | $t_f$        |  | -   | 41   | -   | ns            |
| Turn-on energy                        | $E_{on}$     |  | -   | 1.62 | -   | mJ            |
| Turn-off energy                       | $E_{off}$    |  | -   | 0.8  | -   | mJ            |
| <b>Diode Characteristics</b>          |              |  |     |      |     |               |
| Reverse Recovery Time                 | $t_{rr}$     | $V_R=400V, I_F=30A,$<br>$di/dt=200A/us$  | -   | 76   | -   | ns            |
| Reverse Recovery Charge               | $Q_{rr}$     |  | -   | 0.33 | -   | $\mu\text{C}$ |
| Peak Reverse Recovery Current         | $I_{rrm}$    |  | -   | 8.6  | -   | A             |




Characteristics Curves

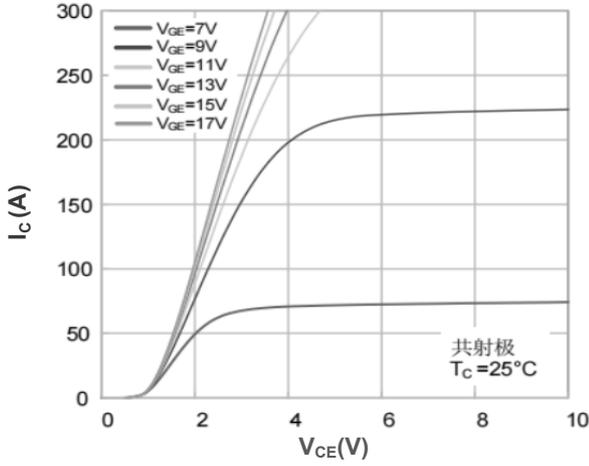


Output Characteristics

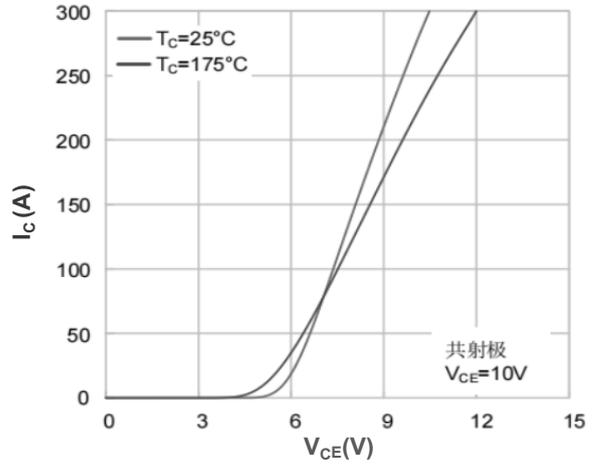


Transfer Characteristics

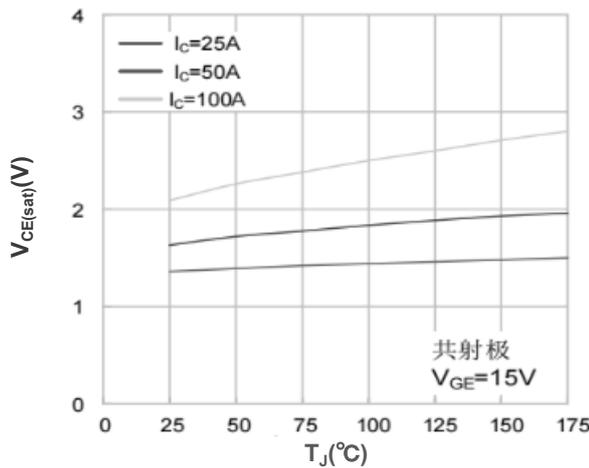


"Typical collector-emitter saturation voltage as a function of junction temperature" ( $V_{GE}=15V$ )

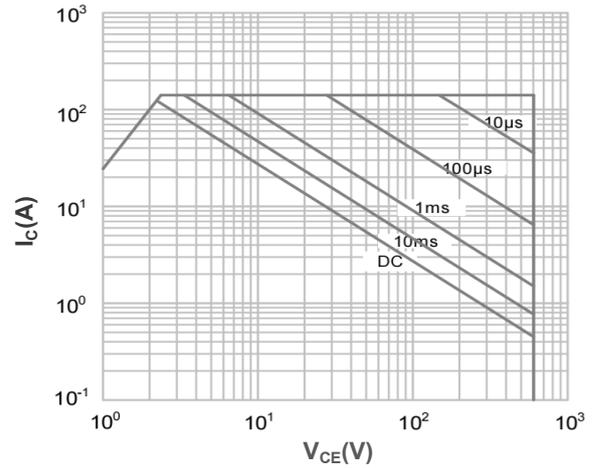


Maximum Safe Operating Area

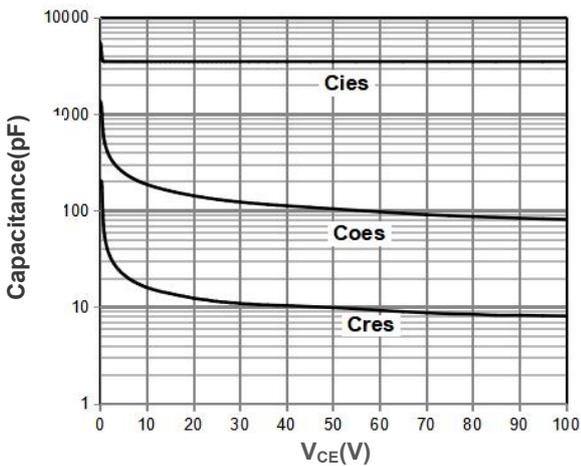


Capacitance

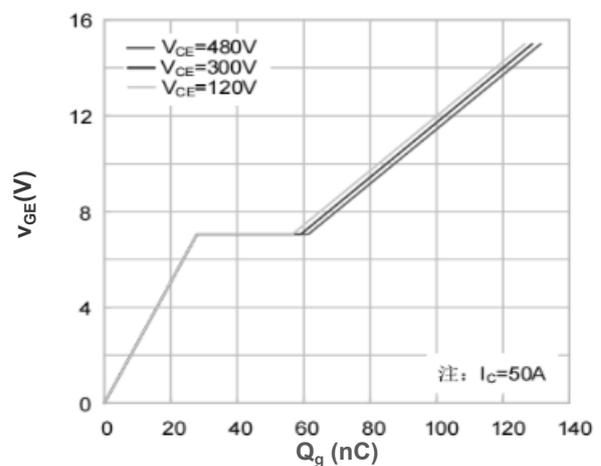

Typical gate charge

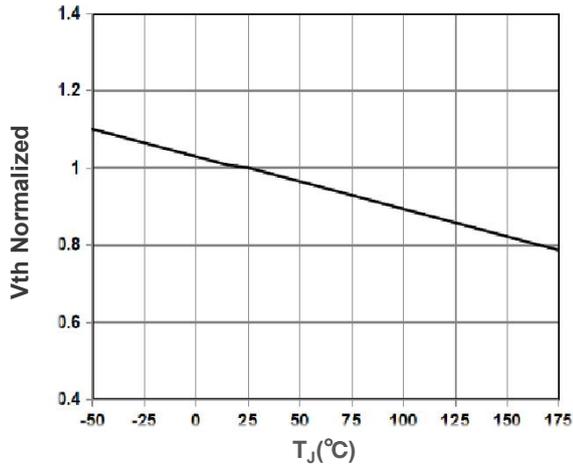

Gate-emitter threshold voltage as a function of junction temperature

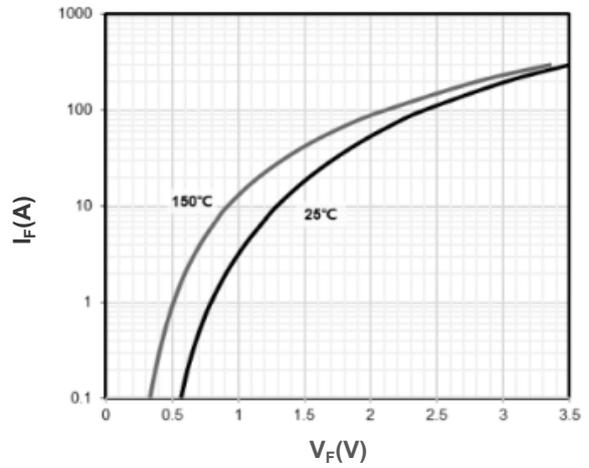

Typ. diode forward current as a function of forward voltage

Note : The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.



TO-247L Package Dimensions

Unit: mm

| Symbol | Min   | Nom   | Max   | Symbol | Min   | Nom  | Max   |
|--------|-------|-------|-------|--------|-------|------|-------|
| A1     | 2.20  | 2.40  | 2.60  | E2     | 5.00  |      | 5.50  |
| A2     | 1.85  |       | 2.15  | E3     | 1.90  |      | 2.60  |
| b      | 1.07  |       | 1.33  | e      |       | 5.44 |       |
| b2     | 1.90  |       | 2.16  | L      | 19.30 |      | 19.90 |
| b4     | 2.90  |       | 3.20  | L1     | 3.95  | 4.15 | 4.35  |
| c      | 0.52  |       | 0.68  | ΦP     | 3.40  |      | 3.80  |
| D      | 20.70 | 20.80 | 21.30 | ΦP1    | 7.00  |      | 7.40  |
| D1     | 16.15 |       | 16.95 | S      | 6.04  | 6.15 | 6.30  |
| E      | 15.50 | 15.60 | 16.10 |        |       |      |       |

