MC5D5P030TL

MOSFETs Silicon 30V P-Channel MOS

Applications

- Synchronus Rectification
- Industrial and Motor Drive
- DC/DC and AC/DC Converters
- Power Tools

Product Summary


V_{DS}	-30	V
I_D	-100	A
$R_{DS(ON),Typ}$@-10V	5.1	mΩ
$R_{DS(ON),Typ}$@-4.5V	7.4	mΩ
Q_g	84	nC


Features

- High-Speed Switching
- Low gate charge
- low reverse transmission capacitance
- Improved dv/dt capability
- 100% UIS and RG Tested

RoHS Pb Lead-free HF

TO-220

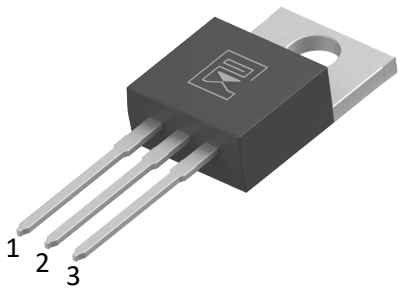



Gate： 1

Drain： 2

Source： 3

Package Marking and Ordering Information

Ordering code	Marking	Package	Packaging	Min. package quantity
MC5D5P030TL	MC5D5P030TL	TO-220	Tube	1000

Absolute Maximum Ratings（Tc=25℃ unless otherwise noted)

Parameter			Symbol	Ratings	Unit
Drain-Source Voltage			V_{DS}	-30	V
Gate-Source Voltage			V_{GS}	±20	V
Continuous Drain Current	Tc=25℃	(Note 1)	I_D	-100	A
Continuous Drain Current	Tc=100℃	(Note 1)		-64	A
Drain Current-Pulsed		(Note 1)	I_{DM}	-320	A
Total Dissipation			P_D	88	W
Junction Temperature			T_j	150	℃
Storage Temperature			T_{stg}	-55-150	℃
Single Pulse Avalanche Energy		(Note 2)	E_{AS}	124	mJ

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings.

Thermal Characteristics

Parameter	Symbol	Max	Unit
Maximum Junction-to-Case	$R_{\theta JC}$	1.45	℃/W
Maximum Junction-to-Ambient	$R_{\theta JA}$	60	℃/W

Note 1：Ensure that the channel temperature does not exceed 150℃.


Note 2：V_{DD}=-30V, Tch= 25℃(initial), L=0.5mH, R_g=25Ω.

Note：This transistor is sensitive to electrostatic discharge and should be handled with care.


Electrical Characteristics（Tc=25℃ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static Parameters						
Drain-Source Breakdown Voltage	BV_{DSS}	V_{GS}=0V,I_D=-250uA	-30	-	-	V
Drain-Source Leakage Current	I_{DSS}	V_{DS}=-30V,V_{GS}=0V	-	-	-1	uA
Gate-Body Leakage Current	I_{GSS}	V_{GS}=±20V,V_{DS}=0V	-	-	±100	nA
Gate Threshold Voltage	$V_{GS(TH)}$	V_{GS}=V_{DS},I_D=-250uA	-1.1	-1.6	-2.1	V
Drain-Source On Resistance	$R_{DS(ON)}$	V_{GS}=-4.5V,I_D=-15A	-	7.4	9.0	mΩ
		Tj=125℃	-	10.4	-	
		V_{GS}=-10V,I_D=-20A	-	5.1	5.5	
		Tj=125℃	-	7.1	-	
Dynamic Characteristics						
Input Capacitance	C_{iss}	V_{DS}=-25V,V_{GS}=0V, f=1.0MHz	-	4300	-	pF
Output Capacitance	C_{oss}		-	385	-	pF
Reverse Transfer Capacitance	C_{rss}		-	354	-	pF
Switching Paramters						
Turn-On Delay Time	$t_{d(on)}$	V_{DS}=-15V,I_D=-20A, V_{GS}=-10V,R_G=3Ω	-	16	-	ns
Turn-On Rise Time	t_r		-	59	-	ns
Turn-Off Delay Time	$t_{d(off)}$		-	143	-	ns
Turn-Off Rise Time	t_f		-	37	-	ns
Total Gate Charge	Q_g	V_{DS}=-15V,I_D=-20A, V_{GS}=-10V	-	84	-	nC
Gate-Source Charge	Q_{gs}		-	12	-	nC
Gate-Drain Charge	Q_{gd}		-	20	-	nC
Source-Drain Characteristics						
Diode Forward Voltage	V_{sd}	V_{GS}=0V,I_S=-10A	-	-0.8	-1.2	V
Reverse Recovery Time	t_{rr}	V_R=-15V,I_F=-20A, di/dt=100A/us	-	13	-	ns
Reverse Recovery Charge	Q_{rr}		-	2.5	-	nC


Characteristics Curves

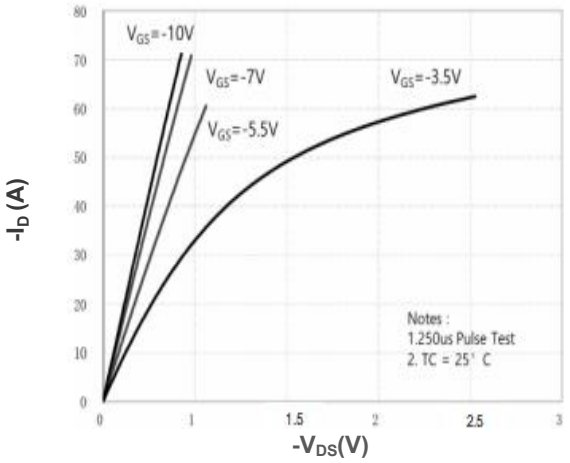


Output Characteritsics

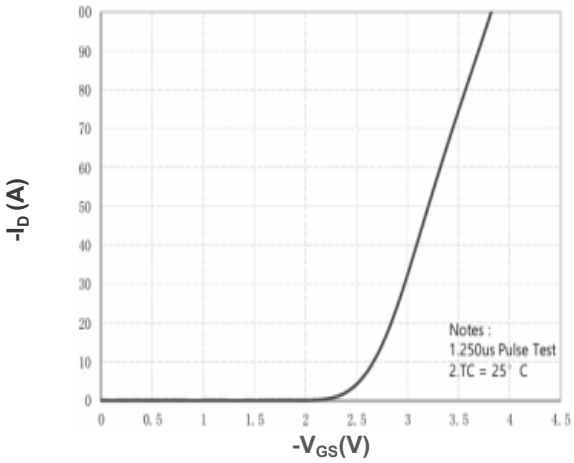


Transfer Characteritsics

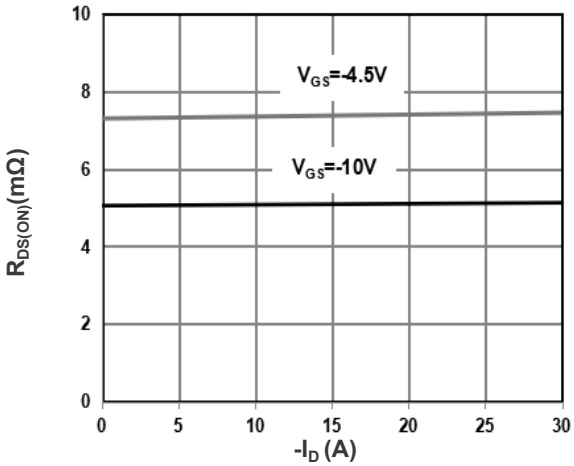


On Resistance Vs Drain Current

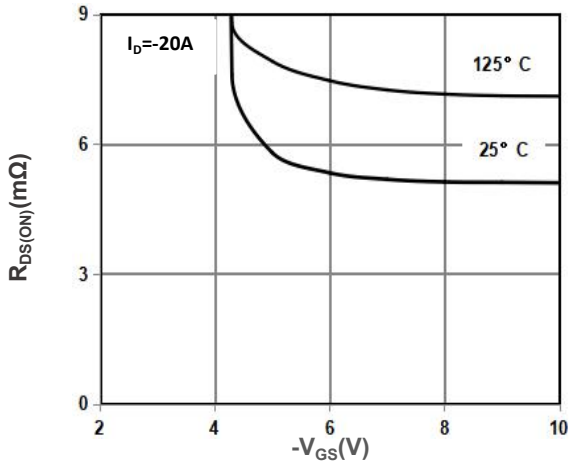


On Resistance Vs Gate Source Voltage

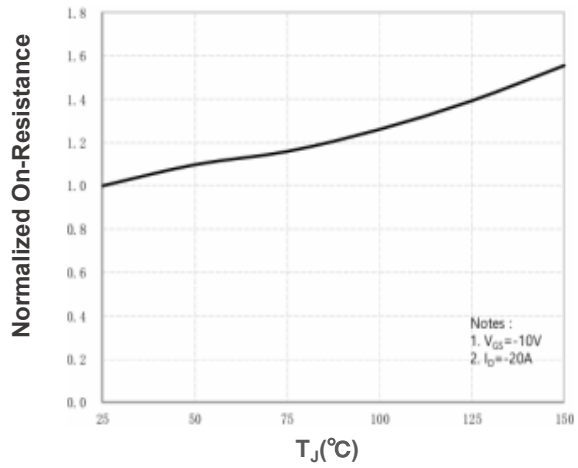


Rdson-JunctionTemperature

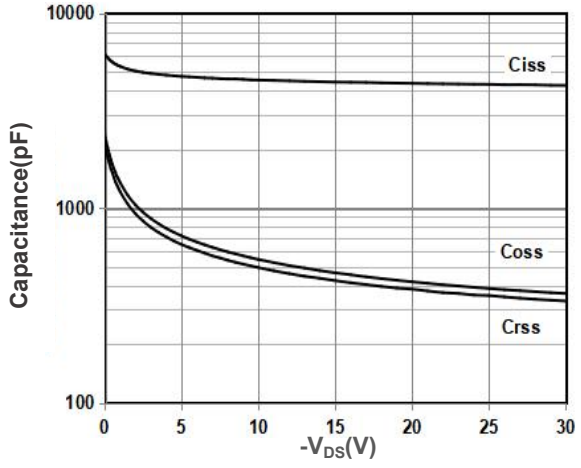


Capacitance

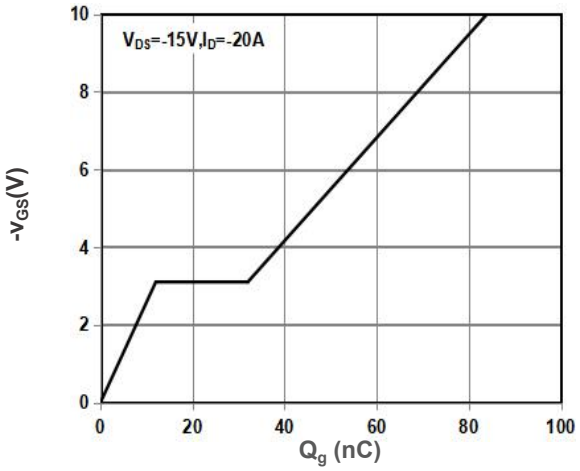

Gate Charge Waveform

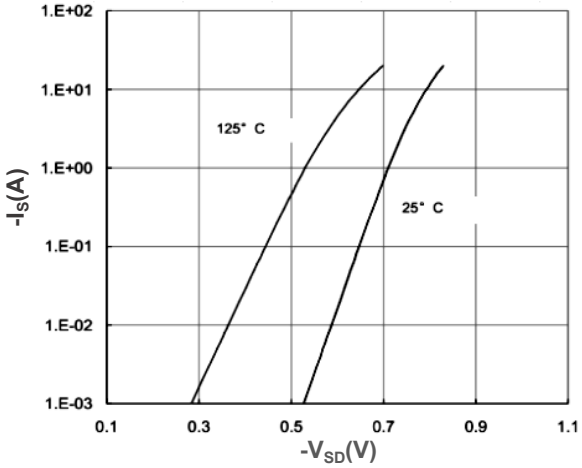

Source-Drain Diode Forward Voltage

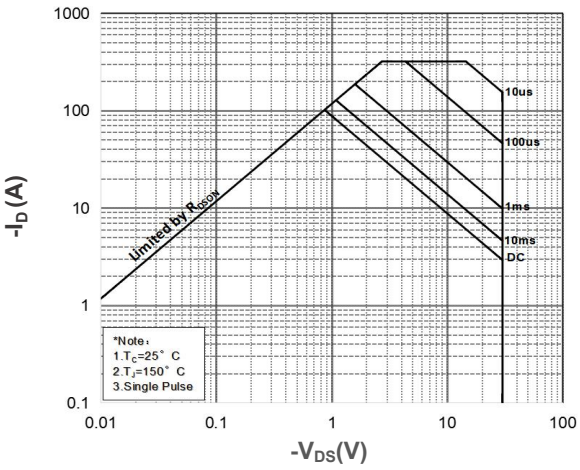


Maximum Safe Operating Area


Note： The above characteristics curves are presented for reference only and not guaranteed by production test, unless otherwise noted.

Test Circuit & Waveform


Gate Charge Test Circuit & Waveform

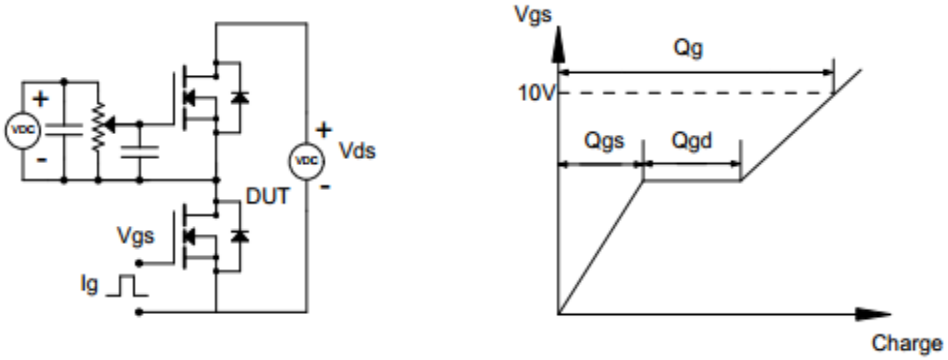

Resistive Switching Test Circuit & Waveform

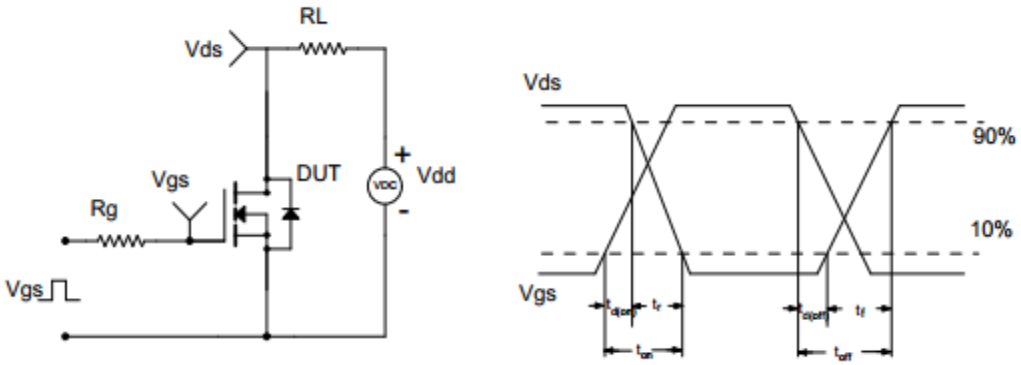

Unclamped Inductive Switching (UIS) Test Circuit & Waveform

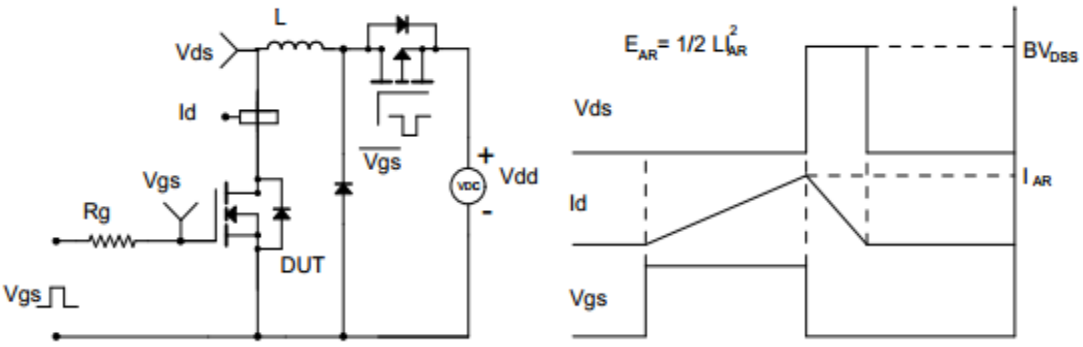

TO-220 Package Dimensions

Unit：mm

Symbol	Min	Nom	Max	Symbol	Min	Nom	Max
A	4.00		4.80	e	2.44	2.54	2.64
B	1.20		1.40	F	1.10		1.40
B1	1.00		1.40	L	12.50		14.50
b1	0.75		0.95	L1	3.00	3.50	4.00
c	0.40		0.55	ΦP	3.70	3.80	3.90
D	15.00		16.50	Q	2.50		3.00
D1	5.90		6.90	Q1	2.00		2.90
E	9.90		10.70	Y	8.02	8.12	8.22

