

**4A 650V SiC Schottky Diode****■ Applications**

- Switch Mode Power Supply
- Power Factor Correction
- Solar Inverter
- Uninterruptible Power Supply

■ Features


- No Reverse Recovery/ No Forward Recovery
- Temperature Independent Switching Behavior
- Positive Temperature Coefficient on V_F
- Fast Reverse Recovery
- High Surge Current Capability
- 100% UIS and RG Tested

■ Product Summary

V_{RRM}	650	V
$I_F@T_c=150^{\circ}C$	4	A
$V_{F,TYP}@T_c=25^{\circ}C$	1.5	V
$V_{F,TYP}@T_c=175^{\circ}C$	1.8	V
Qc	8.5	nC

■ Benefits

- Higher System Efficiency
- System Cost and Size Savings
- High Frequency Operation
- Higher System Reliability
- Reduced EMI

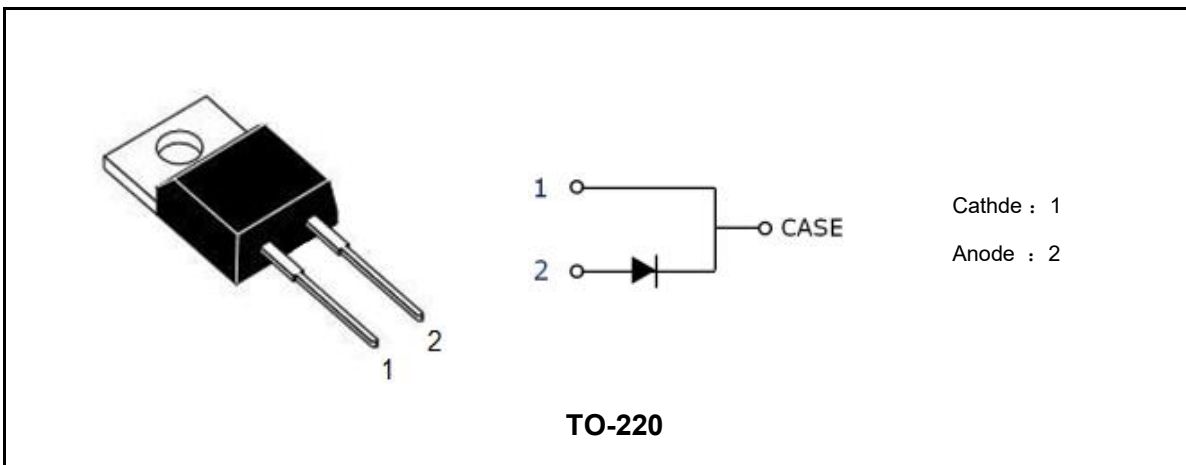

Marking	Package	Packaging	Min. package quantity
MC3S04C065	TO-220	Tube	1000





■ Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Parameter	Symbol	Ratings	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	650	V
Surge Peak Reverse Voltage	V_{RSM}	650	V
DC Peak Blocking Voltage	V_R	650	V
Continuous Forward Current Tc=150°C	I_F	4	A
Repetitive Peak Forward Surge Current	I_{FSM}	35	A
Power Dissipation	P_D	50	W
Junction Temperature	T_J	175	°C
Storage Temperature	T_{stg}	-55-175	°C

■ Thermal Characteristics

Parameter	Symbol	Max	Unit
Maximum Junction-to-Case	$R_{\theta JC}$	3	°C/W
Maximum Junction-to-Ambient	$R_{\theta JA}$	60	°C/W


■ Electrical Characteristics (Tc=25°C unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static Parameters						
DC Blocking Voltage	V _{DC}	I _R =100uA	650	-	-	V
Forward Voltage	V _F	I _F =4A	-	1.5	1.7	V
		I _F =4A, T _J =175℃	-	1.8	2.3	V
Reverse Current	I _R	V _R =650V	-	0.5	10	uA
		V _R =650V, T _J =175℃	-	10	50	uA
AC Parameters						
Total Capacitive Charge	Q _C	I _F = 4A, dI/dt=500A/μs, V _R =400V, T _J =25℃	-	8.5	-	nC
Total Capacitive	C	V _R =1V, f=1MHz	-	135	-	pF
		V _R =200V, f=1MHz	-	17	-	
		V _R =400V, f=1MHz	-	16	-	







■ Characteristics Curves

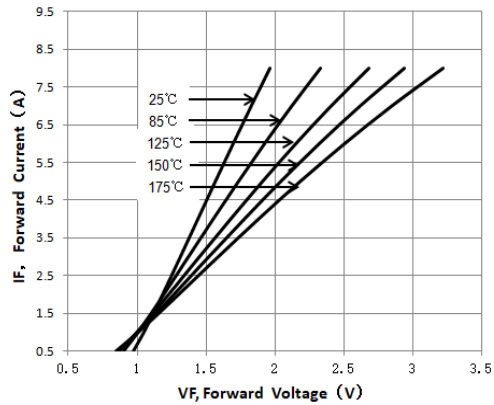


Forward Characteristics

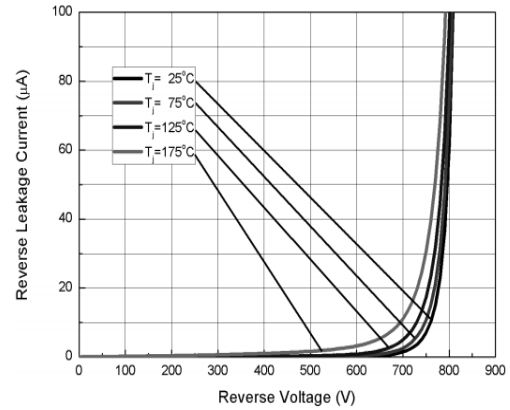


Reverse Characteristics

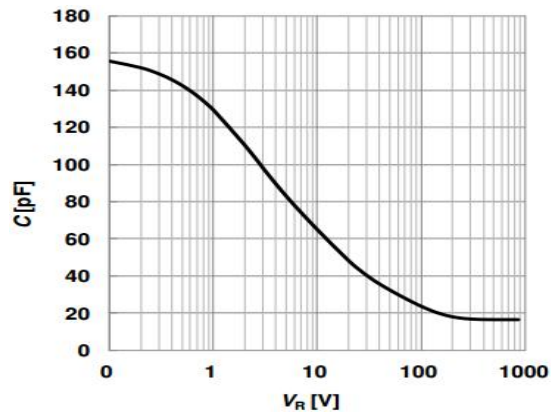

Capacitance

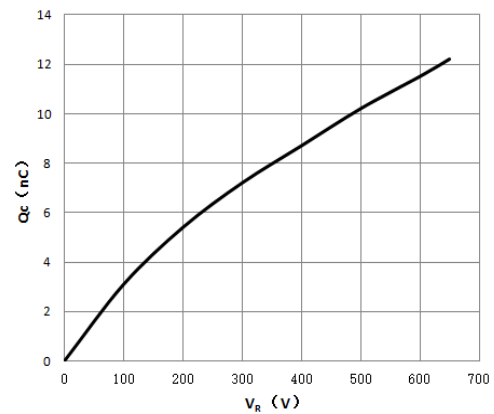

Recovery Charge vs. Reverse Voltage

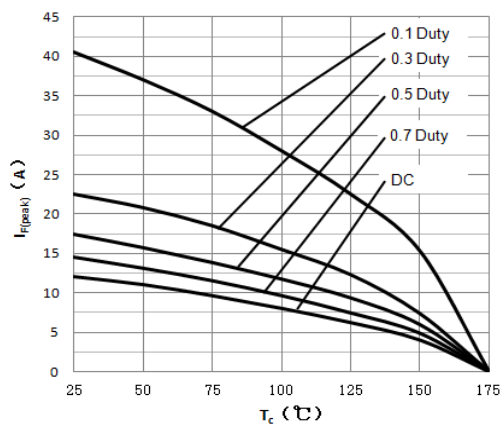

Current Derating



**■ TO-220 Package Dimensions**

Unit: mm

Symbol	Min	Nom	Max	Symbol	Min	Nom	Max
A	4		4.8	e		2.54	
B	1.2		1.4	e1	1		1.5
B1	1		1.4	F	1.1		1.4
b1	0.65		1	L	12.5		14.5
c	0.4		0.55	LI	3	3.5	4
D	15		16.5	ΦP		3.8	
D1	5.9		6.9	Q	2.5		3
E	9.9		10.7	Q1	2		2.9

